



ETHOS 242x150 H 214

TURKISH BATH + SHOWER

LT VERSION




The overall dimension values are expressed in centimetres.
The actual dimensions may vary by ± 1 cm.

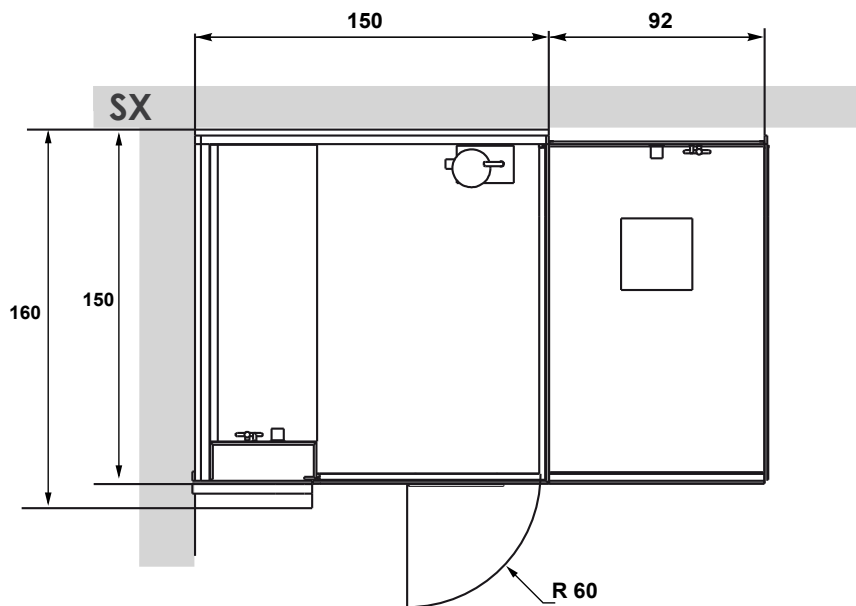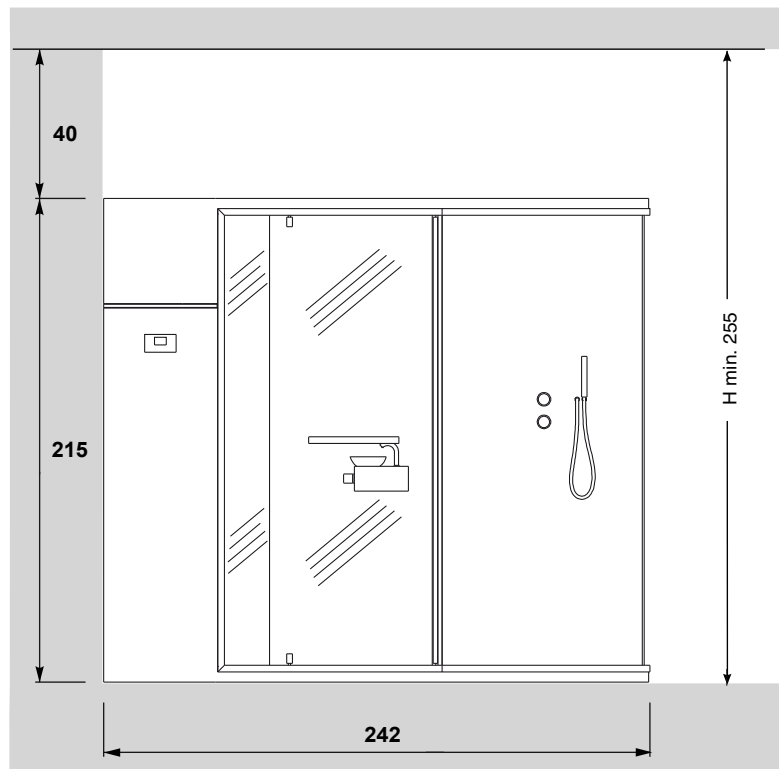

The minimum height of the wall tiles without protrusions is equal to the height of the stall.
On the walls there cannot be any greca or quarter round decorative patterns.

LT VERSION

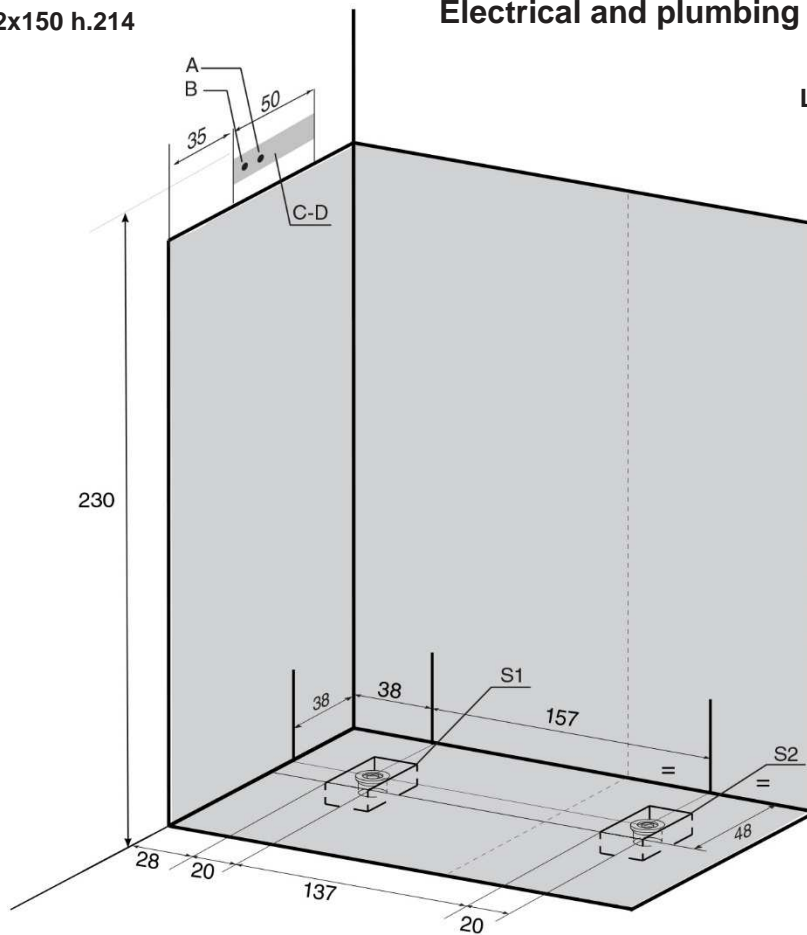

KEY

A-B- Water wall connections.

A - 1/2" F cold water wall connection.

B - 1/2" F hot water wall connection.

C-D- Electrical tube outlet.


C - Power cable outlet (SINGLE PHASE OR THREE PHASE).

D - Equipotential cable outlet.

S1 - Turkish bath drain Ø 40mm.


S2 - Shower drain Ø 40mm.

Provide waterproof sheathing



Tube with sleeve Ø 40

ELECTRICAL CHARACTERISTICS:	RESISTANCES	Volts	A	Kw	Hz	FUSE	MAXIMUM TEMPERATURE
TURKISH BATH	2 x 2.000 W	230	17	4	50	1x25 A	50 °C
		400	10	4	50	2x16 A	

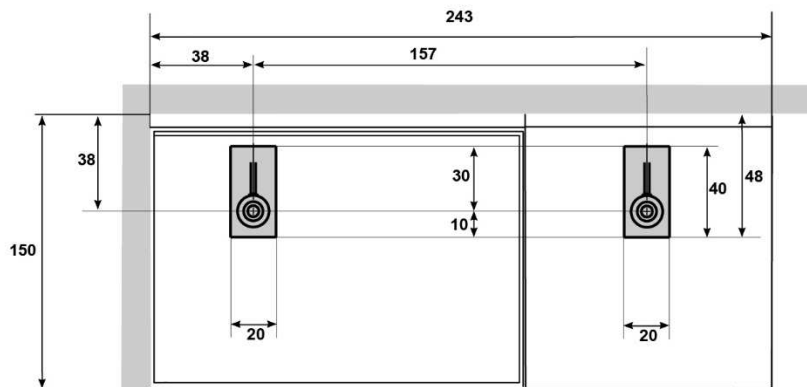

SAUNA VITA srl reserves the right to make changes to products at any time without giving prior notice