


ETHOS 252x150 H 215


SAUNA+SHOWER

RT VERSION

SAUNAVITA®
calore naturale

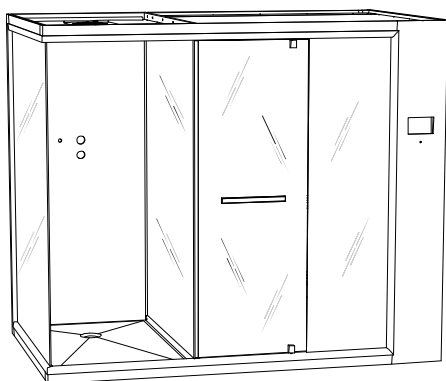


The overall dimension values are expressed in centimetres.
The actual dimensions may vary by ± 1 cm.

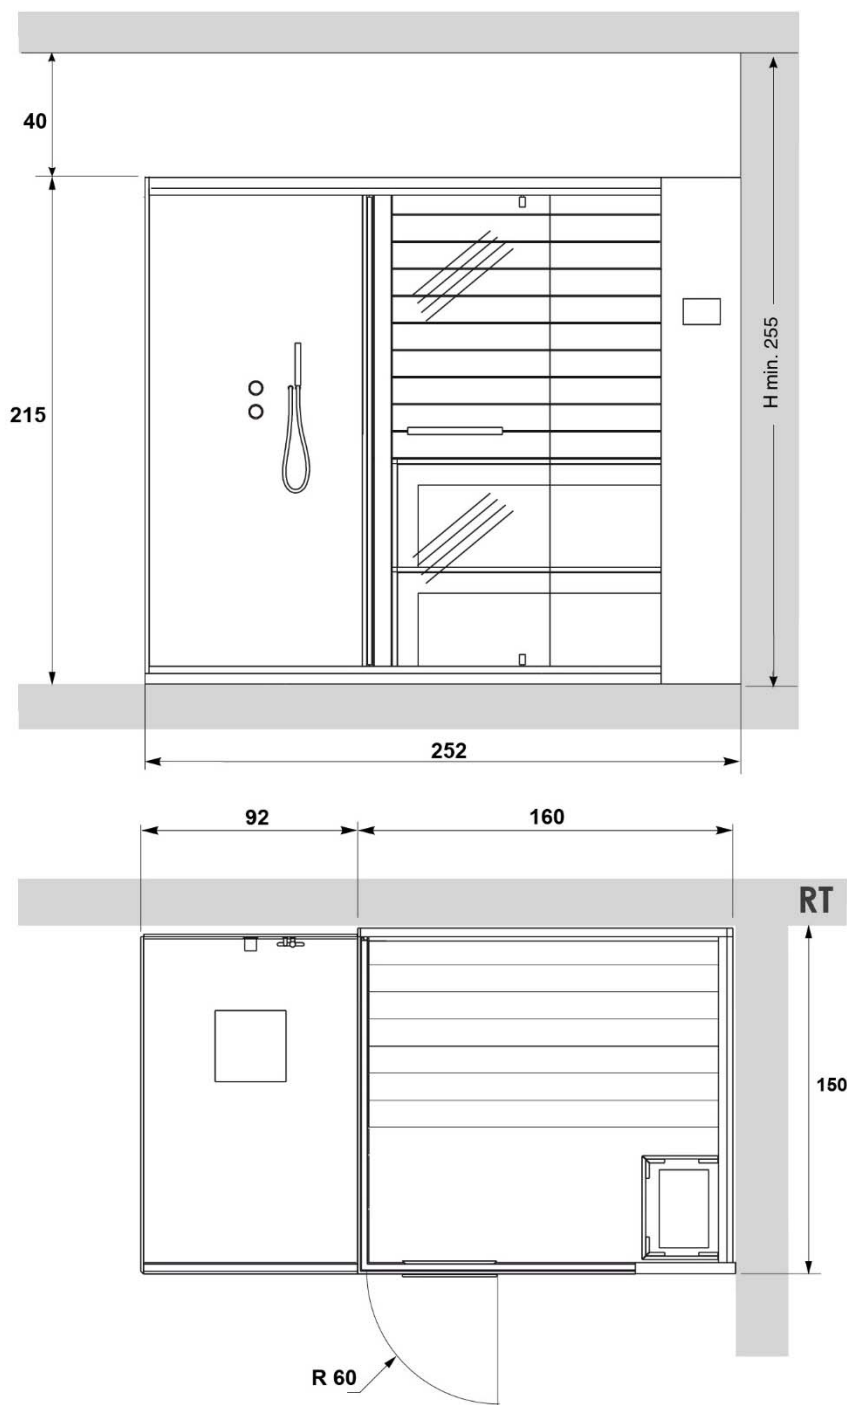

The minimum height of the wall tiles without protrusions is equal to the height of the stall.
On the walls there cannot be any greca or quarter round decorative patterns.

Electrical and plumbing provisions

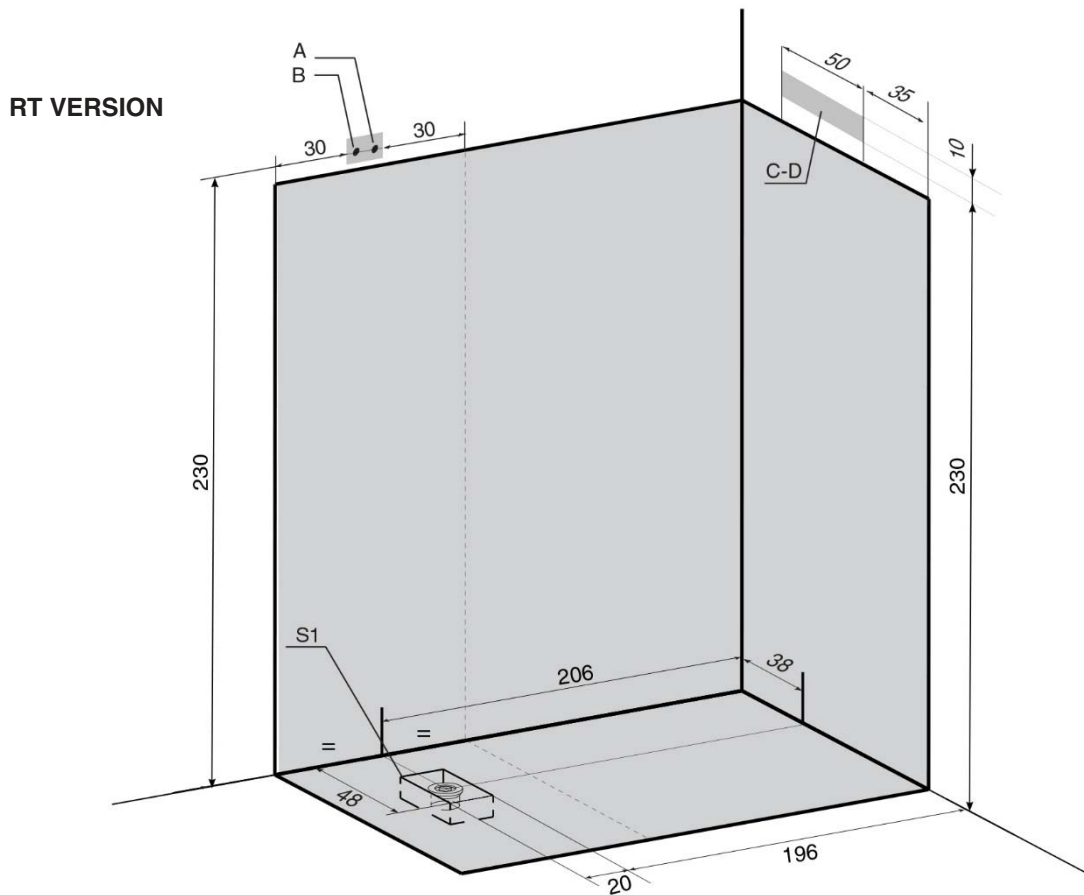

KEY

A-B- Water wall connections.

A" - 1/2" F cold water wall connection.

B" - 1/2" F hot water wall connection.


C-D- Electrical tube outlet.

C" - Power cable outlet (SINGLE PHASE OR THREE PHASE).


D" - Equipotential cable outlet.

S1 - Shower drain Ø 40mm.

Provide waterproof sheathing.

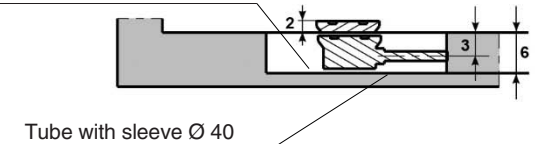

ELECTRICAL CHARACTERISTICS:	RESISTANCES					FUSE	MAXIMUM TEMPERATURE
		Volts	A	Kw	Hz		
SAUNA	2 x 1.800W	230	16	3.6	50	1x20 A	100 °C
		400	8	3.6	50	3x16 A	

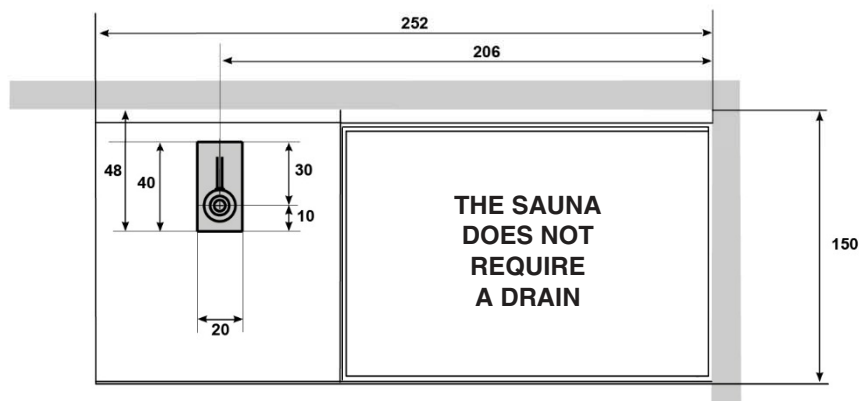

SAUNA VITA srl reserves the right to make changes to products at any time without giving prior notice