### Column LAMA CARBONIO

# Technical data sheet



#### LEGENDA:

A-B = Hot and cold attacks area.

- A Cold water connection 1/2"F \*.
- B Hot water connection 1/2"F \*



Operating pressure:


- MIN 150 kPa (1,5 bar)
- MAX 300 kPa (3,0 bar)
- Hot water temperature:
- MAX 60°C (140°F)
- C Equipotential output.
- X Height from the shower tray

(To be calculated based on height of the user)

\* The height above ground for the connection of the hot and cold water varies with the height from the shower tray.

## 16.5 16.5 15.7 10.3 10.3 10.3 10.3

### MEASURES FOR POSITIONING THE BRACKETS

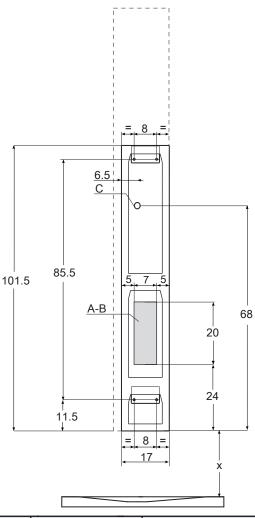

### INSTALLATION:

- -Installation must be done on the floor once walls are finished and shower tray installed.
- -Do not have pipes passing where fixing holes have to be made.
- -L 'height of the shower head and the shower head vary with the height of the positioning of the column equipped

### CAUTION:

-Provide a protective divider wall so that the whirlpool jets do not leak into the room.

The overall dimensions are given in centimetres. Actual dimensions can vary by  $\pm 0.5$  cm.

| SISTEM           | Electrical specificatio |    |    | Hydraulic characteristics |                    |                   | Dimension |       |        | Overall Dimensions |       |        |        |      |
|------------------|-------------------------|----|----|---------------------------|--------------------|-------------------|-----------|-------|--------|--------------------|-------|--------|--------|------|
|                  | Volt                    | VA | Hz | Water consumption         | Pressure exercises | Link H/C<br>Water |           |       |        | Pack dimension     |       |        | Weight |      |
|                  |                         |    |    |                           |                    |                   |           | Width | Height | Lengh              | Width | Height | Net    | Gros |
| LAMA<br>CARBONIO |                         |    |    | 15 l/min                  | 1,5/3,0            | 1/2"              |           | 20    | 161    | 174                | 36    | 66     | 14     | 17   |

If the water pressure is higher than indicated, install pressure reducers.

Provide shut-off cocks out of the dimensions of the product for hot and cold water closing.

defective, whithout covering labor costs necessary for the removal of the product.

NOTICE: If the conditions indicated should not be observed, even partially, the safety of the column may be compromised: therefore both the guarantee, and the responsibility of the manufacturer for any direct or indirect damage caused by the product are forfeit.

The lapse of the guarantee, in the hypothesis indicated above, will have as a result the replacement of the parts which are recognized as being