

MOVE OVAL 155x63 FREESTANDING


TECHNICAL DATA SHEET

HAFRO

WELLNESS & SHOWER

The installation of the tub must be performed by qualified personnel for both regarding the electronic connection that for the hydraulic one.

The overall dimensions are given in centimetres. Actual dimensions can vary by $\pm 0,5$ cm. The bath must also be connected to the building's equipotential earthing system by means of a terminal on the frame.

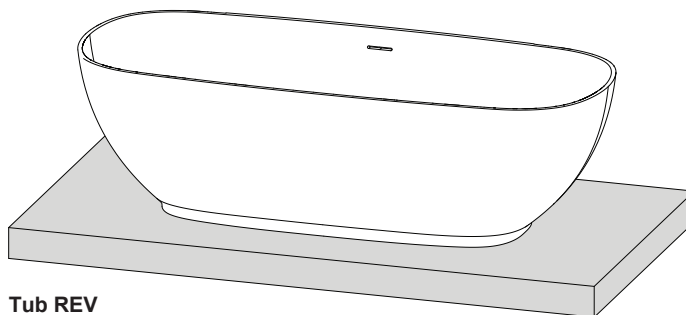



Tub REV

| SYSTEM | ELETRICAL SPECIFICATIONS | | | | JETS | | WATER CONT. | | PACKING DIMENSIONS | | | | WEIGHT (KG) | |
|----------------|--------------------------|---|---|----|--------|-------|-------------|-------|--------------------|-------|--------|--------|-------------|-------|
| | Volt | A | W | Hz | Whirl. | Airl. | Use | Max | Lenght | Width | Height | Volume | Net | Gross |
| Tub with frame | - | - | - | - | - | - | 185 l | 225 l | 165 | 75 | 70 | 0.87 | 75 | 85 |

If the bath is to be recessed in walls, the guarantee will only be valid if the walls are fitted with inspection and aeration grids of a suitable size. It is also important that the bath can be taken out at any time without having to do anything to the walls.

WARNING:

If all or even part of the above described conditions are not complied with the safety of the whirlpool bath cannot be guaranteed and, as such, not only is the guarantee invalidated but also the manufacturer can in no way be held liable for any direct or indirect damages caused by the bath. In those cases where such conditions are not complied with, the guarantee will only cover the substitution of parts deemed defective and not the labour needed if the bath has to be removed.

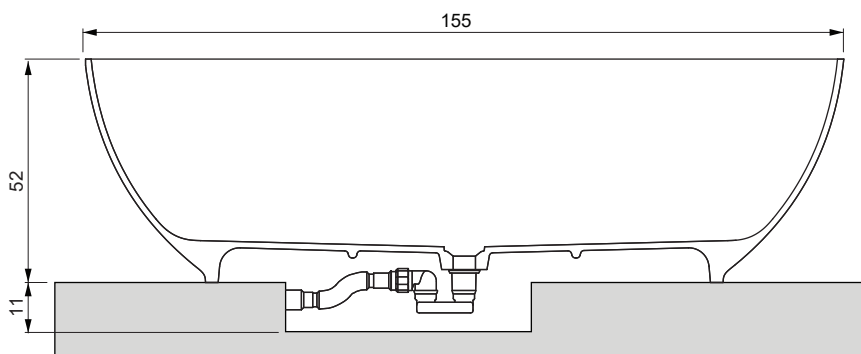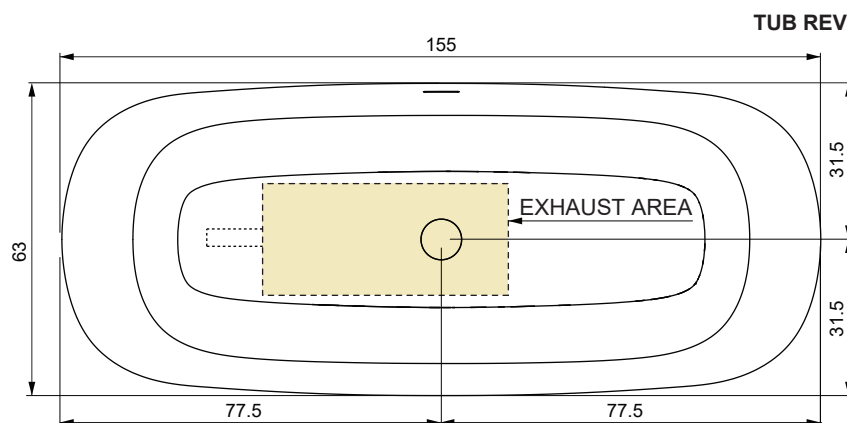

ELECTRIC AND HYDRAULIC PREPARATION



LEGEND

S - Exhaust Ø40 mm.

NOTE

- For hot and cold water connections see the technical details of the floor-mounted taps.

TUB REV

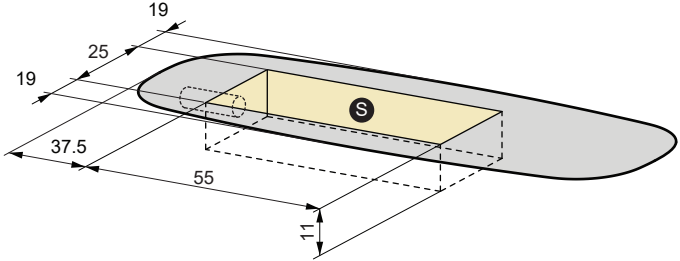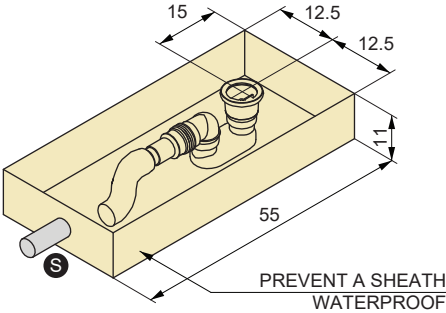

POSITIONING OF IGNITION CONTROLS AND TAPS

TAPS

